



Austin / Adora / Cora



Austin 16

Austin

60" x 30" x 20"

Austin 16

60" x 30" x 16"

Adora

60" x 32" x 20"

Corra

66" x 34" x 20"

Acrylic Skirted Bath

Features

- Integral tile flange
- Sloped lumbar support
- Above floor rough-in
- Fits a standard 60", 66" opening
- Available in both left and right end drain
- Patterned bottom

Austin / Adora / Corra

Skirted Bath

Austin • 60" x 30" x 20" • 1524 mm x 762 mm x 508 mm

Austin 16 • 60" x 30" x 16" • 1524 mm x 762 mm x 406 mm


Adora • 60" x 32" x 20" • 1524 mm x 813 mm x 508 mm

Corra • 66" x 34" x 20" • 1676 mm x 864 mm x 508 mm

Austin BO60L/R • Bathtub

General Specifications


Bathtub average weight	68 lbs	31 kg
Bathing well at the bottom	44 ½" x 21"	1130 x 533 mm
Capacity to drain overflow	46 gallons	209 litres
Bathtub water depth from drain to overflow	12 ¾"	324 mm
Drain opening diameter	2"	51 mm
Overflow opening diameter	2 ½"	64 mm
Drain to floor clearance	3"	76 mm

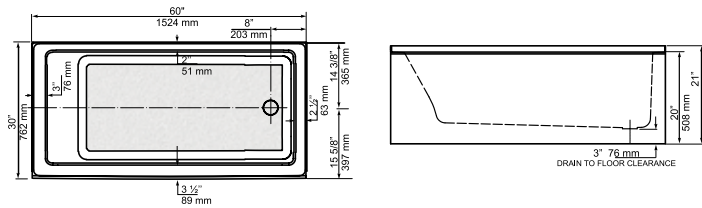

Austin 16 BO70L/R • Bathtub

General Specifications

Average bathtub weight	67 lbs	30 kg
Bathing well dimensions at bottom	48" x 23"	1219 mm x 584 mm
Capacity to drain overflow	38 gallons	173 litres
Bathtub water depth from drain to overflow	10"	254 mm
Drain opening diameter	2"	51 mm
Overflow opening diameter	2 ½"	64 mm
Drain to floor clearance	3"	76 mm

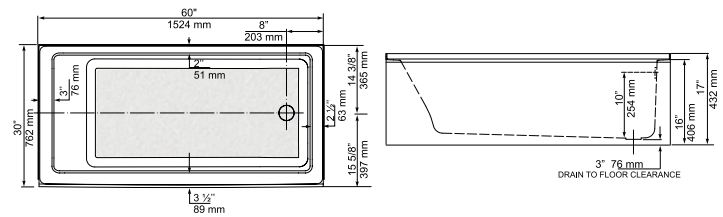

Adora BO62L/R • Bathtub WO62L/R • Whirlpool WB62L/R • W/P with Backjet


AO62L/R • Jet Air AB62L/R • J/A with Backjets UB62L/R • Combination - Back Jets

General Specifications

Bathtub average weight	70 lbs	32 kg
Average whirlpool weight	109 lbs	49 kg
Average jet air weight	81 lbs	37 kg
Average combination weight	119 lbs	54 kg
Bathing well at the bottom	43" x 21"	1092 x 533 mm
Capacity to drain overflow	49 gallons	223 litres
Minimum operating space	40 gallons	182 litres
Bathtub water depth from drain to overflow	12 ¾"	321 mm
Drain opening diameter	2"	51 mm
Overflow opening diameter	2 ½"	64 mm
Drain to floor clearance	3"	76 mm

Electrical Specifications


Whirlpool Pump/Motor	¾ HP	7.5 AMP	120V
Jet Air Blower		8.5 AMP	120V

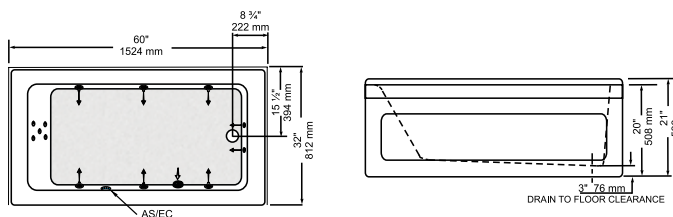

Corra BO32L/R • Bathtub

General Specifications

Average weight: Bathtub	88 lbs	40 kg
Bathing well dimensions at bottom	49" x 23"	1245 mm x 584 mm
Capacity to drain overload	55 gallons	250 litres
Minimum operating space	44 gallons	200 litres
Bathtub water depth from drain to overflow	12 ½"	318 mm
Drain opening diameter	2"	51 mm
Overflow opening diameter	2 ½"	64 mm
Drain to floor clearance	3"	76 mm

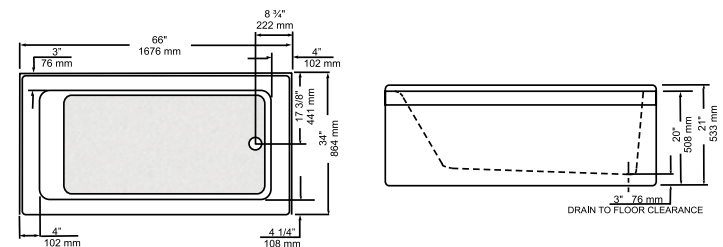

Colours



Meets or Exceeds the Following Specifications:

CAN/CSA - B45 Series

CAN/SCA - C22.2 No.218.2 - Hydromassage Standard

Mirolin Industries Corp

60 Shorncliffe Road, Toronto, ON M8Z 5K1

mirolin.com

support@mirolin.com

T 416 231 5790

800 MIROLIN (647 6546)

F 416 231 0929

800 463 2236

Important:

Dimensions of fixtures are nominal and may vary ± 6 mm (¼"). These measurements are subject to change at Manufacturer's discretion.



© Copyright 2010 Mirolin Ind. The Copyright includes all content on the document.