



Gryphon 1 60" x 30" x 20"
Gryphon 2 66" x 32" x 20"
Gryphon 3 72" x 34" x 20"

Acrylic Alcove Bath

Features

- Integral tile flange
- Sloped lumbar support
- Above floor rough-in
- Fits a standard 60", 66", 72" opening
- Available in both left and right end drain

Gryphon Series

Acrylic Alcove Bath

Gryphon 1 • GR 6030 • 60" x 30" x 20" • 1524 mm x 762 mm x 508 mm

Gryphon 2 • GR 6632 • 66" x 32" x 20" • 1676 mm x 813 mm x 508 mm

Gryphon 3 • GR 7234 • 72" x 34" x 20" • 1829 mm x 864 mm x 508 mm

Tub Features

- Built-in 1" tile flange on 3 sides
- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish

Whirlpool System

- ¾ HP pre-wired pump and motor factory installed on a platform base
- 6 directional adjustable flow whirlpool jets, 2 foot jets
- 4 spinner back jets included in all GRA L/RBW models
- Standard colour coordinated jets; polished chrome, or brushed nickel also available to specify
- Mounted air switch (A/S)

Jet Air System

- 8.5 Amp variable speed blower on a platform base
- Gryphon 1: 14 air jets, Gryphon 2: 16 air jets, Gryphon 3: 20 air jets
- 4 air back jets included in all jet air with back jet models
- Standard colour coordinated jets; polished chrome, or brushed nickel also available to specify
- Mounted electronic touch control pad with on/off, speed, and oscillation control (E/C)

Ultimate Combo

- Includes all the whirlpool + jet air features with 6 whirlpool jets, 4 spinner back jets, 2 foot jets and 14 air jets Gryphon 2, 18 air jets Gryphon 3
- Standard colour coordinated jets; polished chrome or brushed nickel also available as an upgrade
- Mounted electronic touch control pad with on/off, (air and whirlpool), speed and oscillation control (E/C)

Optional Accessory

- Factory installed whirlpool heater

Meets or Exceeds the Following Specifications:

- CAN/CSA B45 Series
- CAN/ULC - S102.2 - M88 Flame Spread FRP laminate rating
- CAN/SCA - C22.2 No.218.2 - Hydromassage Standard


GR 6030 L/R • Bathtub

GRA 6030 L/RAW • Whirlpool

GRA 6030 L/RBW • Whirlpool with Backjet

JGR 6030 L/RD • Jet Air

JGR 6030 L/RDB • Jet Air with Backjet



General Specifications

| | | |
|--|---------------|------------------|
| Average tub weight | 58 lbs | 26 kg |
| Average whirlpool weight | 99 lbs | 45 kg |
| Average jet air weight | 73 lbs | 33 kg |
| Bathing well dimensions at bottom | 21 ½" x 45 ½" | 546 mm x 1156 mm |
| Capacity to drain overflow | 48 gallons | 218 litres |
| Minimum operating litres | 36 gallons | 164 litres |
| Bathtub water depth from drain to overflow | 13" | 330 mm |
| Drain opening diameter | 2" | 51 mm |
| Overflow opening diameter | 2 ½" | 64 mm |
| Drain to floor clearance | 3" | 76 mm |

Electrical Specifications

| | | | |
|----------------------|------|---------|------|
| Whirlpool Pump/Motor | ¾ HP | 7.5 AMP | 120V |
| Jet Air Blower | | 8.5 AMP | 120V |

GR 6632 L/R • Bathtub


GRA 6632 L/RAW • Whirlpool

GRA 6632 L/RBW • Whirlpool with Backjet

JGR 6632 L/RD • Jet Air

JGR 6632 L/RDB • Jet Air with Backjet

JG 6632 L/RW • Combination

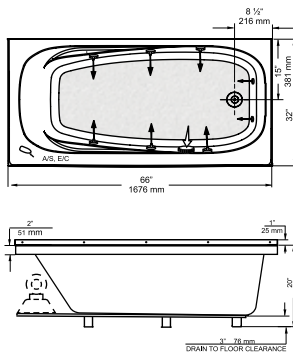

General Specifications

| | | |
|--|------------|------------------|
| Average tub weight | 62 lbs | 28 kg |
| Average whirlpool weight | 97 lbs | 44 kg |
| Average jet air weight | 73 lbs | 33 kg |
| Average combination weight | 101 lbs | 46 kg |
| Bathing well dimensions at bottom | 23" x 50" | 559 mm x 1194 mm |
| Capacity to drain overflow | 52 gallons | 236 litres |
| Minimum operating litres | 34 gallons | 155 litres |
| Bathtub water depth from drain to overflow | 13" | 324 mm |
| Drain opening diameter | 2" | 51 mm |
| Overflow opening diameter | 2 ½" | 64 mm |
| Drain to floor clearance | 3" | 76 mm |

Electrical Specifications

| | | | |
|----------------------|------|---------|------|
| Whirlpool Pump/Motor | ¾ HP | 7.5 AMP | 120V |
| Jet Air Blower | | 8.5 AMP | 120V |

GR 7234 L/R • Bathtub


GRA 7234 L/RAW • Whirlpool

GRA 7234 L/RBW • Whirlpool with Backjet

JGR 7234 L/RD • Jet Air

JGR 7234 L/RDB • Jet Air with Backjet

JG 7234 L/RW • Combination



General Specifications

| | | |
|--|------------|------------------|
| Average tub weight | 68 lbs | 31 kg |
| Average whirlpool weight | 103 lbs | 47 kg |
| Average jet air weight | 77 lbs | 35 kg |
| Average combination weight | 108 lbs | 49 kg |
| Bathing well dimensions at bottom | 24" x 53" | 610 mm x 1346 mm |
| Capacity to drain overflow | 64 gallons | 291 litres |
| Minimum operating litres | 45 gallons | 204 litres |
| Bathtub water depth from drain to overflow | 13" | 330 mm |
| Drain opening diameter | 2" | 51 mm |
| Overflow opening diameter | 2 ½" | 64 mm |
| Drain to floor clearance | 3" | 76 mm |

Electrical Specifications

| | | | |
|----------------------|------|---------|------|
| Whirlpool Pump/Motor | ¾ HP | 7.5 AMP | 120V |
| Jet Air Blower | | 8.5 AMP | 120V |

Mirolin Industries Corp

60 Shorncliffe Road, Toronto, ON M8Z 5K1

mirolin.com

support@mirolin.com

T 416 231 5790

800 MIROLIN (647 6546)

F 416 231 0929

800 463 2236

Important:

Dimensions of fixtures are nominal and may vary ± 6 mm (¼"). These measurements are subject to change at Manufacturer's discretion.



© Copyright 2010 Mirolin Ind. The Copyright includes all content on the document.